



GSM Voice Fax Gateway

TVF200


Teltonika GSM VoiceFAX is a multifunctional device designed for facsimile and voice transfer. Device works as fixed line equivalent. It gives a possibility to send and receive fax or voice calls.

Features:

- The RF transceiver modulates the baseband signal to the desired frequency in the 900 MHz or 1800 MHz.
- FAX G3, Class 2.0
- Two RJ14 sockets
- SMA antenna connector
- LED for status indication
- Configuration over DTMF



Connection schemes

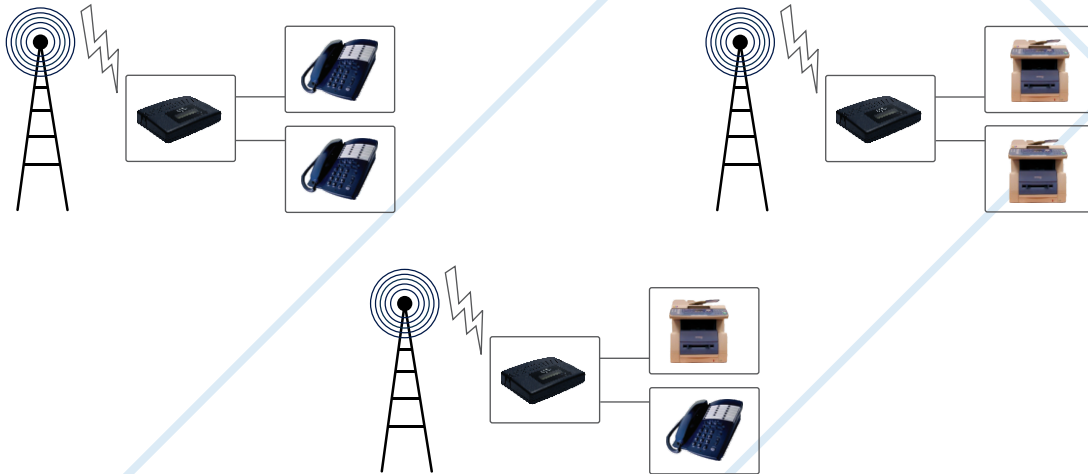

Configurable options

- Time interval between dialing and connecting
- Prefix adding
- Caller ID display control
- Calling line identification restriction
- Call duration signal
- Service menu password
- PIN code control
- Prefix blocking
- Number blocking
- Number of rings to answer
- Number of facsimile retries
- Delay between retries
- Always answer as fax
- Delete facsimile from memory after retries
- Show incoming number of pages
- Volume Control
- Baby Call
- Separate/duplicate RJ14 lines
- Switch Voice/Fax prefix

Product Kit

- Voice Fax unit
- AC/DC power supply
- Antenna
- User guide
- Cardboard box

Technical specifications

- Dimension (H x W x L): 37 x 140 x 106 mm
- Power adapter input: 100-240 VAC
- Power adapter output: 12 V

HQ JSC Teltonika

Saltoniskiu st. 10c
LT-08105, Vilnius
Lithuania

Tel +370 5 212 74 72 (Lithuania)
Tel +370 5 265 73 60 (International Calls Landline)
Tel +370 5 265 73 61 (Landline)
Fax +370 5 276 13 80
Email info@teltonika.lt
Web www.teltonika.lt